

MAX-8



Let's grow together 

MAX-8

Excellent Performance & Reliability

CPC(Q)D15/18/20/25/30/35T8

T8 series 1.5–3.5t forklift

EP EQUIPMENT CO.,LTD
www.ep-ep.com

T8 series 1.5-1.8t forklift specification

General			CPC(QD)15T8				CPC(QD)18T8				CPC(QD)18T8			
1	Manufacturer		CPCD15T8-NE92	CPCD15T8-S4Q	CPCD15T8-F20	CPQD15T8-K21	CPCD18T8-NE92	CPCD18T8-S4Q	CPQD18T8-F20	CPQD18T8-K21	CPCD18T8-NE92	CPCD18T8-S4Q	CPQD18T8-F20	CPQD18T8-K21
2	Model													
3	Power type		Diesel	Diesel	Gasoline	Gasoline	Diesel	Diesel	Gasoline	Gasoline	Diesel	Diesel	Gasoline	Gasoline
4	Rated capacity		1500	1500	1500	1500	1500	1800	1500	1500	1500	1800	1500	1500
5	Load center		500	500	500	500	500	500	500	500	500	500	500	500
6	Lift height		3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000
7	Free lift height		120	120	120	120	120	120	120	120	120	120	120	120
8	Fork size	L×W×T	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35	920×100×35
9	Mast tilt range	F/R	612	612	612	612	612	612	612	612	612	612	612	612
10	Fork overhang(wheel center to fork face)		420	420	420	420	420	420	420	420	420	420	420	420
11	Rear overhang		420	420	420	420	420	420	420	420	420	420	420	420
12	Overall dimensions	Length to face of fork	2230	2230	2230	2230	2270	2230	2230	2230	2270	2230	2270	2230
13		Overall width	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080	1080
14		Mast lowered height	1995	1995	1995	1995	1995	1995	1995	1995	1995	1995	1995	1995
15		Mast extended height	3960	3960	3960	3960	3960	3960	3960	3960	3960	3960	3960	3960
16		Overhead guard height	2070	2070	2070	2070	2070	2070	2070	2070	2070	2070	2070	2070
17	Turning radius(outside)		1995	1995	1995	1995	2035	1995	1995	1995	2035	1995	1995	1995
18	Min.right angle stacking aisle width (Add load length and clearance)		2400	2400	2400	2400	2440	2400	2440	2440	2440	2440	2440	2400
19	Travel (No load)		14	14	14	14	14	14	14	14	14	14	14	14
20	Speed	Lifting (Full load)	460	460	460	460	460	460	460	460	460	460	460	460
21		Lowering (Full load)	450	450	450	450	450	450	450	450	450	450	450	450
22	Max.Drawbar Pull (Full load)		20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)	20500(17500)
23	Max.Gradeability (Full load)		20	20	20	20	20	20	20	20	20	20	20	20
24	Tyres	Front	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
25		Rear	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR	5.00-8-10PR
26	Tread	Front	920	920	920	920	920	920	920	920	920	920	920	920
27		Rear	920	920	920	920	920	920	920	920	920	920	920	920
28	Wheelbase		1430	1430	1430	1430	1430	1430	1430	1430	1430	1430	1430	1430
29	Ground clearance	Lowest	110	110	110	110	110	110	110	110	110	110	110	110
30	Wheelbase center clearance		145	145	145	145	145	145	145	145	145	145	145	145
31	Self weight		2700	2700	2700	2700	2900	2700	2900	2700	2900	2700	2900	2700
32	Weight	Full load	3570	3570	3570	3570	3895	3570	3895	3570	3895	3570	3895	3570
33		Rear	630	630	630	630	705	630	705	630	705	630	705	630
34	Distribution	Front	1215	1215	1215	1215	1305	1215	1305	1215	1305	1215	1305	1215
35		Rear	1485	1485	1485	1485	1595	1485	1595	1485	1595	1485	1595	1485
36	Battery	Voltage/Capacity(20HR)	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60	12/60
37		Modal	4TNE92	S4Q2	FE(2.0L)	K21	4TNE92	S4Q2	FE(2.0L)	K21	4TNE92	S4Q2	FE(2.0L)	K21
38	Manufacture		YANMAR	Mitsubishi	Mazda	Nissan	YANMAR	Mitsubishi	Mazda	Nissan	YANMAR	Mitsubishi	Mazda	Nissan
39	Rated output/r.p.m		33/2450	32.9/2500	37.2/2700	31.2/2250	33/2450	32.9/2500	37.2/2700	31.2/2250	33/2450	32.9/2500	37.2/2700	31.2/2250
40	Engine	Rated torque/r.p.m	136/1600	135/2000	142/1800	143.7/1600	136/1600	135/2000	142/1800	143.7/1600	136/1600	135/2000	142/1800	143.7/1600
41		No.of cylinder	4	4	4	4	4	4	4	4	4	4	4	4
42	Bore×Stroke		92×100	88×103	86×94	89×83	92×100	88×103	86×94	89×83	92×100	88×103	86×94	89×83
43	Displacement		2659	2505	2184	2065	2659	2505	2184	2065	2659	2505	2184	2065
44	Fuel tank capacity		50	50	50	50	50	50	50	50	50	50	50	50
45	Manufacture		CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
46	Transmissions	Type												
47	Stage		1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)
48	Operating pressure	For attachments	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m, Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m) 2. Attachment available.

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

T8 series 2.0-2.5t forklift specification

General	1		Manufacture		CPC(QD)20T8								CPC(QD)25T8							
	Model		Model		CPQD20T8-S4S	CPQD20T8-	CPQD20T8-	CPQD20T8-K21	CPQD20T8-F20	CPQD20T8-491	CPQD25T8-S4S	CPQD25T8-	CPQD25T8-	CPQD25T8-K21	CPQD25T8-F20	CPQD25T8-491				
Characteristics & Dimensions	2	Power type			Diesel	2000	2000	2000	2000	Gasoline	2500	2500	2500	2500	Gasoline	2500				
	3	Rated capacity		Kg	2000	2000	2000	2000	2000	Gasoline	2500	2500	2500	2500	Gasoline	2500				
	4	Load center		mm	500	500	500	500	500	500	500	500	500	500	500	500				
	5	Lift height		mm	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000	3000				
	6	Free lift height		mm	120	120	120	120	120	120	120	120	120	120	120	120				
	7	Fork size	L×W×T	mm	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40	1070×120×40				
	8	Mast tilt range	F/R	deg	612	612	612	612	612	612	612	612	612	612	612	612				
	9	Fork overhang(wheel center to fork face)		mm	476	476	476	476	476	476	476	476	476	476	476	476				
	10	Rear overhang		mm	485	485	485	485	485	485	485	550	550	550	550	550				
	11	Length to face of fork		mm	2610	2610	2610	2610	2610	2610	2660	2660	2660	2660	2660	2660				
Performance	12	Overall dimensions	Overall width	mm	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150				
	Mast lowered height		mm	1995	1995	1995	1995	1995	1995	1995	1995	1995	1995	1995	1995					
	Mast extended height		mm	4200	4200	4200	4200	4200	4200	4200	4200	4200	4200	4200	4200					
	Overhead guard height		mm	2130	2130	2130	2130	2130	2130	2130	2130	2130	2130	2130	2130					
	Turning radius(outside)		mm	2170	2170	2170	2170	2170	2170	2230	2230	2230	2230	2230	2230					
	17	Min.right angle stacking aisle width (Add load length and clearance)		mm	2680	2680	2680	2680	2680	2680	2740	2740	2740	2740	2740	2740				
Performance	19	Speed	Travel (No load)	Km/h	20	20	20	20	20	20	20	20	20	20	20	20				
	Lifting (Full load)		mm/sec	450	450	450	450	450	450	450	450	450	450	450	450					
	Lowering (Full load)		mm/sec	450	450	450	450	450	450	450	450	450	450	450	450					
	Max.Drawbar Pul (Full load)		N	17500	17500	17500	17500	17500	17500	17500	17500	17500	17500	17500	17500					
	23	Max.Gradeability (Full load)		%	20	20	20	20	20	20	20	20	20	20	20	20				
Chassis	24	Tyres	Front	mm	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR	7.00-12-12PR				
	Rear		mm	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR	6.00-9-10PR					
	25	Tread	Font	mm	970	970	970	970	970	970	970	970	970	970	970	970				
	Rear		mm	970	970	970	970	970	970	970	970	970	970	970	970					
	26	Wheelbase	Lowest	mm	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600				
	Ground clearance		mm	120	120	120	120	120	120	120	120	120	120	120	120	120				
	27	Wheelbase center		mm	145	145	145	145	145	145	145	145	145	145	145	145				
				mm	145	145	145	145	145	145	145	145	145	145	145	145				
Weight	28	Self weight		Kg	3580	3580	3580	3580	3580	3580	3920	3920	3920	3920	3920	3920				
				Kg	4856	4856	4856	4856	4856	4856	5588	5588	5588	5588	5588	5588				
	29	Full load	Front																	
	Rear																			
	30	No load	Front																	
	Rear																			
	31	Voltage/Capacity(20HR)		V/AH	12/60	12/80	12/80	12/60	12/60	12/60	12/60	12/80	12/80	12/60	12/60	12/60				
	Power & transmission	32	Engine	Modal		S4S-DPC	C490BPG-25	A498BT1-39	FE(2.0L)	491	S4S-DPC	C490BPG-25	A498BT1-39	K21	FE(2.0L)	491	491			
		Manufacture			Mitsubishi	CHINA	CHINA	CHINA	Nissan	CHINA	Mitsubishi	CHINA	CHINA	Nissan	Mazda	CHINA	CHINA			
Rated output/r.p.m		kw		34.4/2250	36.8/2400	36.8/2400	31.2/2250	37.2/2700	46/2600		36.8/2400	36.8/2400	36.8/2400	31.2/2250	37.2/2700	46/2600				
Rated torque/r.p.m		N.m		165/1700	156/1500	186/1700	143.7/1600	142/1800	165/1600		165/1700	156/1500	186/1700	143.7/1600	142/1800	165/1600				
No.of cylinder				4	4	4	4	4	4	4	4	4	4	4	4	4	4			
33		Transmission	Bore×Stroke	mm	94×120	90×105	98×105	89×83	86×94	91×86	94×120	90×105	98×105	89×83	86×94	91×86	91×86			
Displacement			cc	3331	2670	3168	2065	2184	2237		3331	2670	3168	2065	2184	2237	2237			
Fuel tank capacity			L	60	60	60	60	60	60	60	60	60	60	60	60	60	60			
Manufacture				CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA			
Type																				
47	Operating pressure	Slage		1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)				
For attachments			Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5	17.5				

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)
3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice. 2. Attachment available.

T8 series 3.0-3.5t forklift specification

1	Manufacture		CPC(QD)30T8				CPC(QD)35T8			
	Model		CPCD30T8-S4S	CPCD30T8-	CPCD30T8-	CPCD30T8-F20	CPQD30T8-491	CPQD30T8-S4S	CPCD35T8-	CPQD35T8-K25
2			Diesel	Diesel	Gasoline	Gasoline	Gasoline	Diesel	Diesel	Gasoline
3	Power type		3000	3000	3000	3000	3000	3500	3500	3500
4	Rated capacity	Kg	500	500	500	500	500	500	500	500
5	Load center	mm	3000	3000	3000	3000	3000	3000	3000	3000
6	Lift height	mm	120	120	120	120	120	120	120	120
7	Free lift height	mm	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×45	1070×125×50	1070×125×50	1070×125×50
8	Fork size	L×W×T	612	612	612	612	612	612	612	612
9	Mast tilt range	F/R	481	481	481	481	481	486	486	486
10	Fork overhang(wheel center to fork face)		590	590	590	590	590	590	590	590
11	Rear overhang	mm	2762	2762	2762	2762	2762	2822	2822	2822
12	Overall dimensions	Length to face of fork	mm	1200	1200	1200	1200	1200	1200	1200
13		Overall width	mm	2005	2005	2005	2005	2005	2005	2005
14		Mast lowered height	mm	4210	4210	4210	4210	4210	4210	4210
15		Mast extended height	mm	2180	2180	2180	2180	2180	2180	2180
16		Overhead guard height	mm	2950	2950	2950	2950	3010	3010	3010
17	Turning radius(outside)		mm	20	20	20	20	20	20	20
18	Min right angle stacking aisle width (Add load length and clearance)		mm	20	20	20	20	20	20	20
19	Speed	Travel (No load)	Km/h	20	20	20	20	20	20	20
20		Lifting (Full load)	mm/sec	400	400	400	400	400	400	400
21		Lowering (Full load)	mm/sec	400	400	400	400	400	400	400
22	Max Drawbar Pull (Full load)		N	21000	21000	21000	21000	21500	21500	21500
23	Max Gradeability (Full load)		%	20	20	20	20	20	20	20
24	Tyres	Front	mm	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR	28×9-15-12PR
25		Rear	mm	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR	6.50-10-10PR
26	Tread	Front	mm	1010	1010	1010	1010	1010	1010	1010
27		Rear	mm	980	980	980	980	980	980	980
28	Wheelbase	Lowest	mm	1700	1700	1700	1700	1700	1760	1760
29		Wheelbase center		140	140	140	140	140	140	140
30	Self weight	Weight	Kg	4450	4450	4450	4450	4700	4700	4700
31		No load		175	175	175	175	175	175	175
32	Weight Distribution	Front		6488	6488	6488	6488	6488	7134	7134
33		Rear		962	962	962	962	1066	1066	1066
34	No load	Front		1810	1810	1810	1810	1810	1927	1927
35		Rear		2640	2640	2640	2640	2773	2773	2773
36	Battery	V/AH		1260	1260	1260	1260	1260	1260	1260
37		Modal		S4S-DPC	A498BT1-39	FE(2.0L)	491	S4S-DPC	A498BT1-39	K25
38	Manufacture	Rated output/r.p.m	kw	36.8/2650	36.8/2650	37.4/2300	46/2600	36.8/2400	37.4/2300	46/2600
39		Rated torque/r.p.m	N.m	165/1700	155/1500	176.5/1600	165/1600	165/1700	176.5/1600	165/1600
40	Engine	No.of cylinder		4	4	4	4	4	4	4
41		Bore×Stroke	mm	94×105	98×105	86×94	91×86	94×120	98×105	89×100
42	Displacement	cc		2670	3168	2184	2237	3331	3168	2488
43		Fuel tank capacity	L	70	70	70	70	75	75	75
44	Transmissions	Type		CHINA	CHINA	CHINA	CHINA	CHINA	CHINA	CHINA
45		Stage		1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)	1/1(2/2)
46	Operating pressure	For attachments	Mpa	17.5	17.5	17.5	17.5	17.5	17.5	17.5
47										
48										

1. Special lifting height available (2-stage mast : 2.5m, 2.7m, 3.0m,3.3m, 3.5m,3.6m, 3.7m,4m,4.3m, 4.5m,5m. Full Free Duplex Mast 3.0m,3.3m,3.5m,3.6m, 3-stage mast : 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m)

3. The parameters in the table are of the standard model. For more information, please contact us. 4. Specification are subject to change without notice.

1.5-1.8t T8 series mast: (pneumatic)

Type	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	1.5t	1.8t	FWD	BWD	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												mm	mm	1.5t	1.8t	1.5t
		mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg	
Wide view mast	2W200	2000	1495	2585	2955	120	120	420	420	6	12	1500	1800	1500	1800	
	2W250	2500	1745	3085	3455	120	120	420	420	6	12	1500	1800	1500	1800	
	2W270	2700	1845	3285	3655	120	120	420	420	6	12	1500	1800	1500	1800	
	2W300	3000	1995	3585	3955	120	120	420	420	6	12	1500	1800	1500	1800	
	2W330	3300	2145	3885	4255	120	120	420	420	6	12	1500	1800	1500	1800	
	2W350	3500	2245	4085	4455	120	120	420	420	6	12	1500	1800	1500	1800	
	2W360	3600	2295	4185	4555	120	120	420	420	6	12	1500	1800	1500	1800	
	2W400	4000	2545	4585	4955	120	120	420	420	6	12	1400	1700	1500	1800	
	2W430	4300	2695	4885	5255	120	120	420	420	6	6	1300	1600	1400	1700	
Wide view full 2-stage mast	2W450	4500	2795	5085	5455	120	120	420	420	6	6	1250	1500	1350	1600	
	2F250	2500	1790	3105	3455	1045	765	420	420	6	12	1500	1800	1500	1800	
	2F270	2700	1890	3305	3655	1145	865	420	420	6	12	1500	1800	1500	1800	
	2F300	3000	2040	3605	3955	1345	1105	420	420	6	12	1500	1800	1500	1800	
	2F330	3300	2190	3905	4255	1495	1165	420	420	6	12	1500	1800	1500	1800	
	2F360	3600	2340	4205	4555	1645	1315	420	420	6	12	1500	1800	1500	1800	
	2F400	4000	2540	4605	4955	1815	1565	420	420	6	12	1400	1700	1500	1800	
	3F430	4300	1965	5070	5255	1425	1080	440	440	6	6	1250	1500	1350	1600	
	3F450	4500	2045	5130	5465	1485	1140	440	440	6	6	1200	1400	1300	1500	
Wide view full 3-stage mast	3F480	4800	2160	5445	5755	1575	1230	440	440	6	6	1100	1300	1200	1400	
	3F500	5000	2210	5605	5955	1665	1320	440	440	6	6	1050	1200	1150	1300	
	3F550	5500	2375	6120	6455	1825	1480	440	440	3	6	/	/	950	1100	
	3F600	6000	2600	6695	6955	1975	1630	440	440	3	6	/	/	750	900	

Note: 1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.

2.0-2.5t T8 series mast: (pneumatic)


Tpye	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	2.0t	2.5t	Deg	Deg	Load capacity at 500 mm				
				Without backrest	With backrest							Single tire		Double tire		
												mm	mm	kg	kg	kg
Wide view mast	2W200	2000	1585	2740	3420	120	120	476	476	6	12	2000	2500	2000	2500	
	2W250	2500	1725	3040	3720	120	120	476	476	6	12	2000	2500	2000	2500	
	2W270	2700	1825	3240	3920	120	120	476	476	6	12	2000	2500	2000	2500	
	2W300	3000	1995	3540	4220	120	120	476	476	6	12	2000	2500	2000	2500	
	2W330	3300	2145	3690	4370	120	120	476	476	6	12	2000	2500	2000	2500	
	2W350	3500	2245	3890	4570	120	120	476	476	6	12	2000	2500	2000	2500	
	2W360	3600	2295	3990	4670	120	120	476	476	6	12	2000	2500	2000	2500	
	2W400	4000	2495	4040	4720	120	120	476	476	6	12	1900	2300	2000	2500	
	2W430	4300	2645	4340	5020	120	120	476	476	6	6	1800	2100	1950	2450	
	2W450	4500	2745	4290	4970	120	120	476	476	6	6	1700	2000	1900	2400	
wide view full 2-stage mast	2F250	2500	1800	2090	2770	1210	560	476	476	6	12	2000	2500	2000	2500	
	2F270	2700	1900	2290	2970	1310	660	476	476	6	12	2000	2500	2000	2500	
	2F300	3000	2050	2590	3270	1460	810	476	476	6	12	2000	2500	2000	2500	
	2F330	3300	2200	3840	4520	1610	960	476	476	6	12	2000	2500	2000	2500	
	2F360	3600	2350	4140	4820	1760	1110	476	476	6	12	2000	2500	2000	2500	
	2F400	4000	2550	4540	5220	2060	1410	476	476	6	12	1900	2300	2000	2500	
wide view full 3-stage mast	3F430	4300	1970	4240	4880	1360	730	490	490	6	6	1700	2000	1900	2400	
	3F450	4500	2050	5720	5040	1460	810	490	490	6	6	1600	1900	1800	2300	
	3F480	4800	2095	6020	5345	1565	915	490	490	6	6	1500	1700	1700	2100	
	3F500	5000	2240	6220	5540	1610	960	490	490	6	6	1400	1600	1600	2000	
	3F550	5500	2320	6800	6120	1770	1120	490	490	3	6	1050	1200	1500	1800	
	3F600	6000	2740	7220	6540	2020	1370	490	490	3	6	700	800	1400	1600	

Note: 1. With sideshifter minus 150Kg, with integral sideshifter minus 100Kg.


3.0-3.5t T8 series mast: (pneumatic)

T ype	Model	Max.fork height	Overall height				Free lift		Front Overhang		Tilt range		Capacity			
			Lowered	Extended		Without backrest	With backrest	FWD			BWD	Load capacity at 500 mm				
				Without backrest	With backrest				Single tire	Double tire		Single tire	Double tire			
														3.0t	3.5t	3.0t
		mm	mm	mm	mm	mm	mm	mm	mm	Deg	Deg	kg	kg	kg	kg	
Wide view mast	2W200	2000	1520	2570	3250	120	120	481	486	6	12	3000	3000	3500	3500	
	2W250	2500	1770	3070	3750	120	120	481	486	6	12	3000	3000	3500	3500	
	2W270	2700	1875	3270	3950	120	120	481	486	6	12	3000	3000	3500	3500	
	2W300	3000	2025	3570	4250	120	120	481	486	6	12	3000	3000	3500	3500	
	2W330	3300	2145	3690	4370	120	120	481	486	6	12	3000	3000	3500	3500	
	2W350	3500	2245	3890	4570	120	120	481	486	6	12	3000	3000	3500	3500	
	2W360	3600	2295	3990	4670	120	120	481	486	6	12	3000	3000	3500	3500	
	2W400	4000	2495	4040	4720	120	120	481	486	6	12	2850	3000	3250	3500	
	2W430	4300	2645	4340	5020	120	120	481	486	6	6	2700	2900	3000	3400	
wide view full 2-stage mast	2W450	4500	2745	4290	4970	120	120	481	486	6	6	2550	2850	2850	3350	
	2F250	2500	1830	2220	2900	1210	560	481	486	6	12	3000	3000	3500	3500	
	2F270	2700	1930	2320	3000	1310	660	481	486	6	12	3000	3000	3500	3500	
	2F300	3000	2080	2620	3300	1460	810	481	486	6	12	3000	3000	3500	3500	
	2F330	3300	2230	3870	4550	1610	960	481	486	6	12	3000	3000	3500	3500	
	2F360	3600	2380	4020	4700	1760	1110	481	486	6	12	3000	3000	3500	3500	
	2F400	4000	2580	4420	5100	2060	1410	481	486	6	12	2850	3000	3250	3500	
	3F430	4300	2000	5570	4910	1360	730	495	500	6	6	2550	2850	2850	3350	
	3F450	4500	2080	5750	5070	1460	810	495	500	6	6	2400	2700	2700	3200	
wide view full 3-stage mast	3F480	4800	2125	6050	5375	1565	915	495	500	6	6	2250	2550	2450	2950	
	3F500	5000	2270	6250	5570	1610	960	495	500	6	6	1650	2250	2300	2800	
	3F550	5500	2350	6830	6150	1770	1120	495	500	3	6	1800	2250	1800	2550	
	3F600	6000	2770	7250	6570	2020	1370	495	500	3	6	1200	2100	1300	2300	


RATED CAPACITIES AND LOAD CENTERS GRAPH

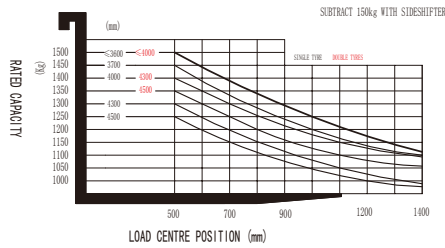


RATED CAPACITIES AND LOAD CENTERS GRAPH

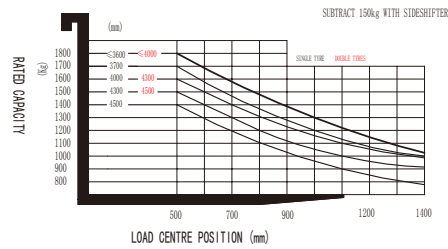


RATED CAPACITIES AND LOAD CENTERS GRAPH

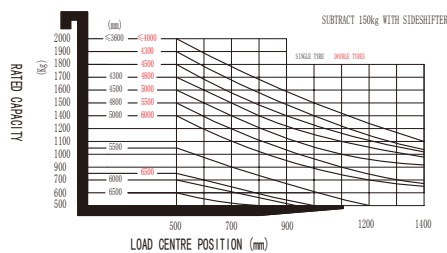


RATED CAPACITIES AND LOAD CENTERS GRAPH

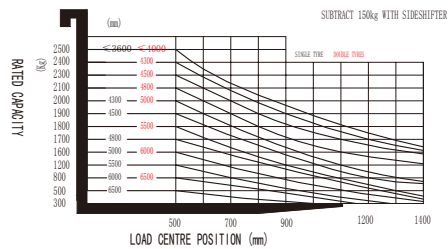

RATED CAPACITIES AND LOAD CENTERS GRAPH

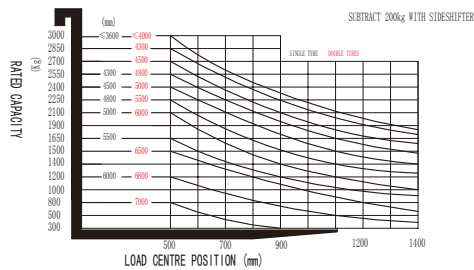

RATED CAPACITIES AND LOAD CENTERS GRAPH

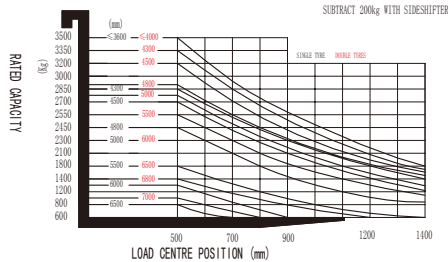

Options	CPC(Q)D15/18T8	CPC(Q)D20/25T8	CPC(Q)D30T8	CPC(Q)D35T8
Other dimension forks	•	•	•	•
fork extension	•	•	•	•
Okamura Transmission	•	•	•	•
LPG system	•	•	•	•
High-mounted exhaust system	•	•	•	•
Middle-mounted exhaust system	•	•	•	•
Dual air cleaner or special air cleaner	•	•	•	•
Solid tyre	•	•	•	•
Non-mark tyre	•	•	•	•
Fork weighing system	•	•	•	•
Special overhead guard height	•	•	•	•
Different lifting height masts	•	•	•	•
PVC shed	•	•	•	•
Side shifter	•	•	•	•
Other attachment	•	•	•	•
Cabin	•	•	•	•
Heater	•	•	•	•
Fan	•	•	•	•
Front window with wiper	•	•	•	•
Rear window with wiper	•	•	•	•
Cabin without side doors	•	•	•	•
Fire extinguisher	•	•	•	•
Full suspension seat	•	•	•	•
Dual drive wheel with fender	•	•	•	•
Rear working light	•	•	•	•
OPS system	•	•	•	•
Special carriage and backrest	•	•	•	•

MAX-8

